


## MBT-1 Standard Version


Flagship model. Greatest capacity to carry & accessorize.

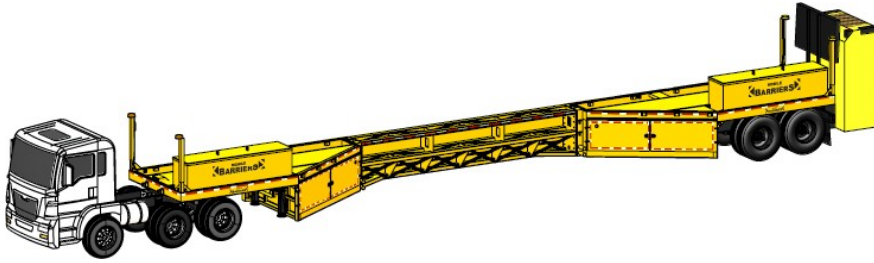

MBT-1	
Length with one 20ft (6.1m) wall	62ft (18.9m)
Weight* with one 20ft (6.1m) wall	30,000lb (13,600kg)
Axes	2
Maximum Wall Sections*	3
Maximum Weight (GWR)#	85,000lb (38,500kg)

## MBT-1 S Shortened Version

Short model for tight applications.

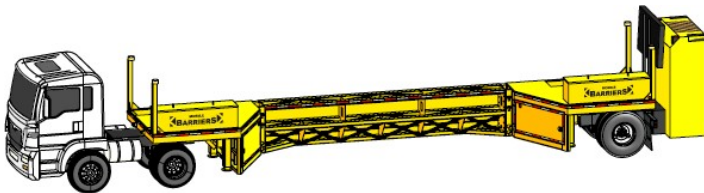


MBT-1s	
Length with one 20ft (6.1m) wall	42ft (12.8m)
Weight* with one 20ft (6.1m) wall	20,000lb (9,000kg)
Axes	1
Maximum Wall Sections*	2
Maximum Weight (GWR)#	45,000lb (20,400kg)

\* Typical number of wall sections = 1 or 2  
 Weight of extra wall section - 5,000lb (2,270kg)  
 # Not to exceed local limits or axle ratings

## MBT-1 ST TowBarrier™

Towable version. Tow from either end by moving hitch.

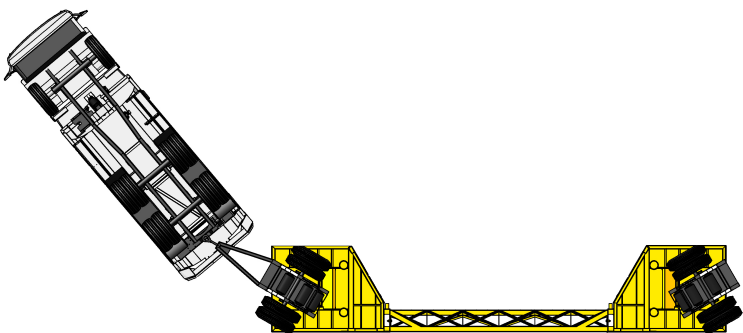

(Equivalent to MBT-1 specifications)

## MBT-1m Security Defense Barrier


Small arms and blast resistant. Custom features.



(Equivalent to MBT-1 specifications)

# TowCushion™ (TMA Substitute)

Semi-autonomous purpose built towable TMA. Can be disconnected and left in position.

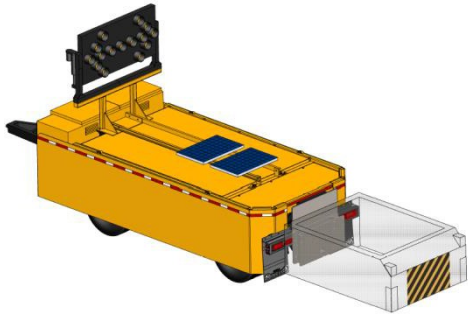


TowCushion	
Length without Impact Attenuator	20ft (6m)
Weight* (TC-20)	20,000lb (9,072kg)
Axles	2-3

\*Heavier options available

## OPTIONS


### Tapered Wall Sections

Full lane access with only 6" of incursion in the adjoining lane.

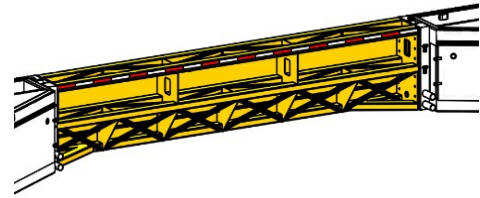


### Interchangeable Deck Options (Hot Box, Water, etc.)

Sub-frames bolt and unbolt from platforms to change options.

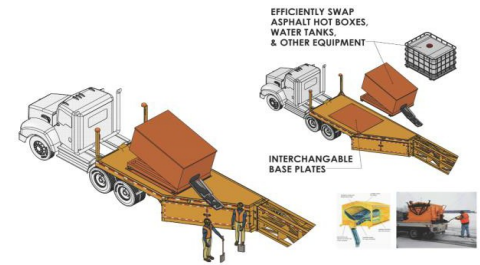


### Crane (Outrigger Protected from Traffic)

Takes only 1 lane. Single outrigger in protected area, folds against wall when not in use. Lifts materials and supplies on/off either deck. Bucket optional.

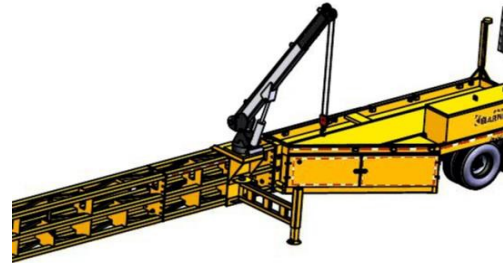

### Ambient Improvement (Fans & Misters)

Lowers temps 10-15 °F and reduces fatigue.

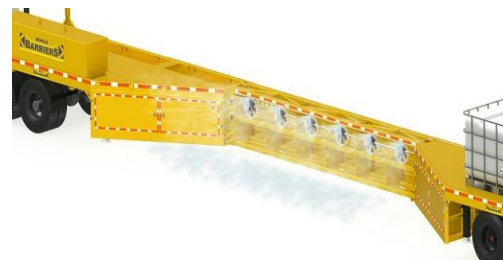

### Scissor Lift

Access upper levels on elevated platform.

